

Dual Band L- and C-band Gooseneck Antenna

Features

- Suitable for Dual Band Applications
 - L-band (1350 – 1390 MHz)
 - Low C-band (4400 – 4700 MHz)
 - Federal C-band (4400 – 5000 MHz)
 - High C-band (4400 – 5000 MHz)
- Flexible arm to reposition antenna
- Other connectors available

Model Shown: MP-1350-5000




Characteristics

Model Number	MP-1350-5000
Frequency	1350-1390 / 4400 - 5000 MHz
Gain	3.5 dBi @ 1350 MHz 3.6 dBi @ 1390 MHz 4.3 dBi @ 4400 MHz 4.8 dBi @ 5000 MHz
VSWR	< 2.5:1 1350 – 1390 MHz < 2.5:1 4400 – 5000 MHz
Pattern	Near omnidirectional in Azimuth
Polarization	Vertical
Power	10 W
Size	9.75" × 0.5"
Weight	4 oz
Connector Type*	TNC Male

*N-type male connector also available.

VSWR

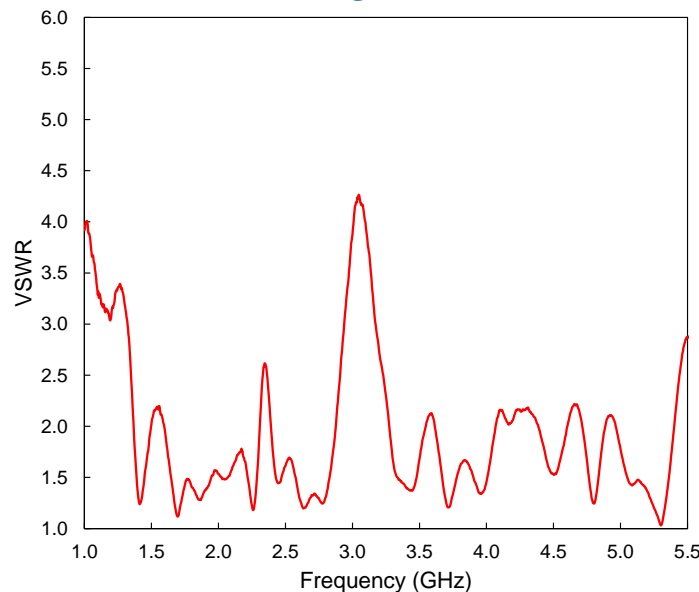

Radiation Patterns

