

Dual Band L- and S-band Gooseneck Antenna



Model Shown: MP-1350-2500

Characteristics


Model Number	MP-1350-2500
Frequency	1350 – 1440 / 2200 – 2500 MHz
Gain	3.5 dBi @ 1350 MHz 3.6 dBi @ 1390 MHz 3.7 dBi @ 1440 MHz 3.8 dBi @ 2200 MHz 3.9 dBi @ 2500 MHz
VSWR	< 2.5:1
Pattern	Near Omnidirectional in Azimuth
Polarization	Vertical
Power	10 W
Size	10.5" × 0.5"
Weight	2.6 oz
Connector Type*	TNC Male

*N-type male and TNC RP connectors also available.



Features

- Suitable for Dual Band Applications
 - L-band (1350 – 1440 MHz)
 - Federal S-band (2200 – 2500 MHz)
 - 2.4 GHz ISM (2400 – 2500 MHz)
- Flexible arm to reposition antenna
- Other connectors available

VSWR

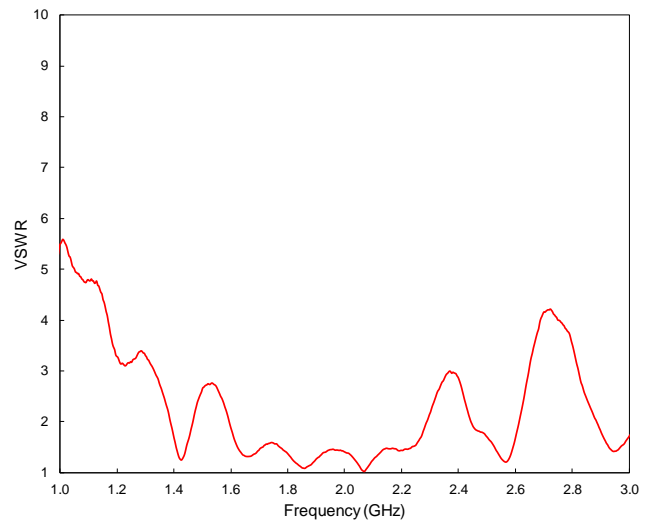

Radiation Patterns

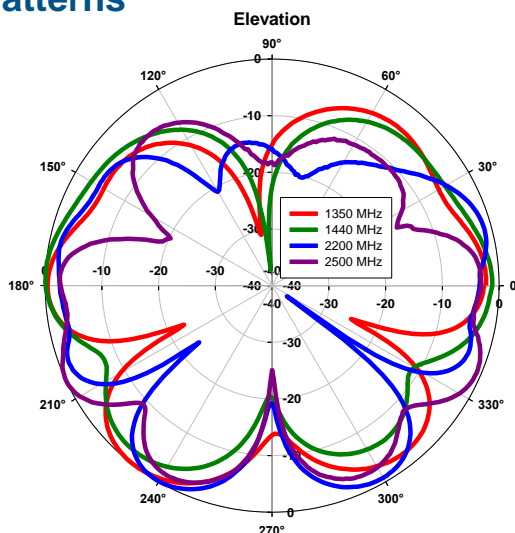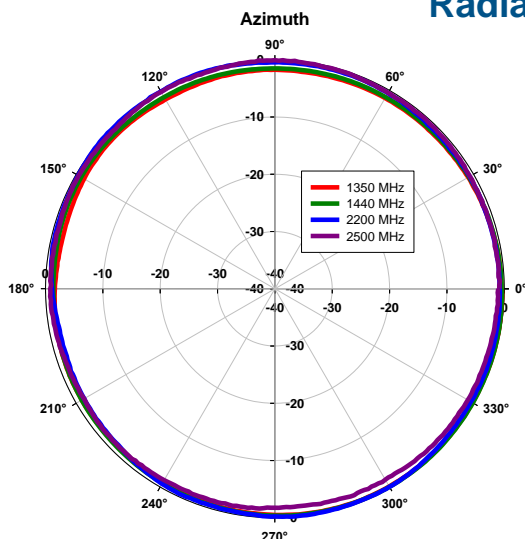

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • email info@octanewireless.com

www.octanewireless.com