

Dual Band S- and C-band Gooseneck Antenna



Model Shown: MP-2200-5000

Characteristics


Model Number	MP-2200-5000
Frequency	2200 – 2500 / 4400 – 5000 MHz
Gain	3.0 dBi @ 2200 MHz 3.1 dBi @ 2500 MHz 3.5 dBi @ 4400 MHz 3.7 dBi @ 5000 MHz
VSWR	< 2.5:1
Pattern	Near Omnidirectional in Azimuth
Polarization	Vertical
Power	10 W
Size	10.5" x 0.5"
Weight	2.6 oz
Connector Type*	TNC Male

*N-type male and TNC RP connectors also available.



Features

- Suitable for Dual Band Applications
 - Federal S-band (2200 – 2500 MHz)
 - 2.4 GHz ISM (2400 – 2500 MHz)
 - Low C-band (4400 – 4700 MHz)
 - Federal C-band (4400 – 5000 MHz)
 - High C-band (4400 – 5000 MHz)
- Flexible arm to reposition antenna
- Other connectors available

VSWR

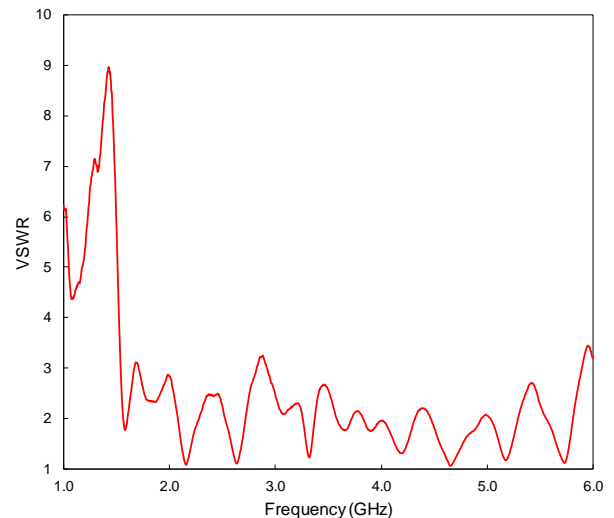

Radiation Patterns

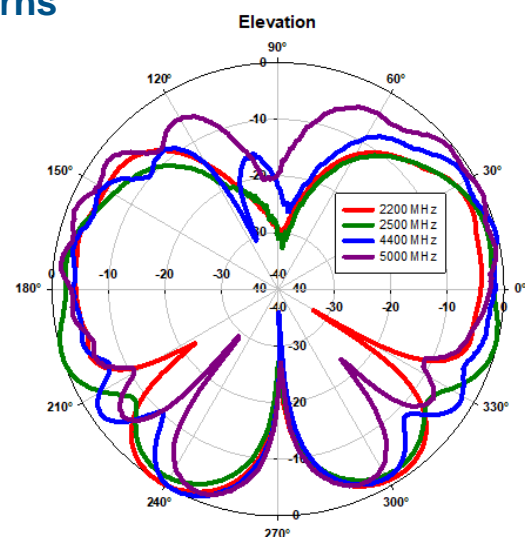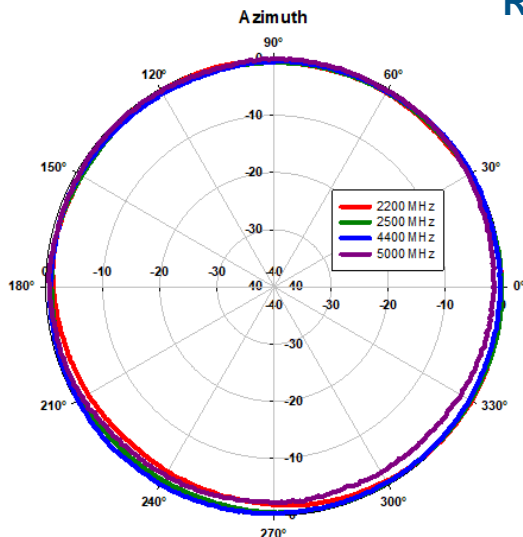

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • email info@octanewireless.com

www.octanewireless.com