


Enhanced Gain LTE Gooseneck Antenna

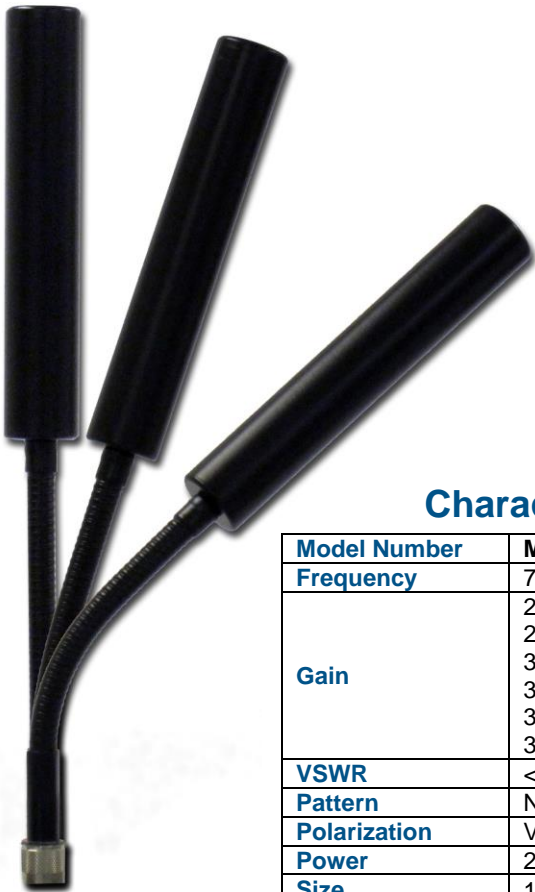

Model Shown: MP-700-3000-EG

Features


- 700 – 3000 MHz operation
- Covers worldwide LTE bands
- Supports 5G
- Flexible arm to reposition antenna
- Easily fits on small radios
- Other connectors available

Characteristics

| | |
|------------------------|---------------------------------|
| Model Number | MP-700-3000-EG |
| Frequency | 700 – 3000 MHz |
| Gain | 2.0 dBi @ 700 MHz |
| | 2.4 dBi @ 900 MHz |
| | 3.6 dBi @ 1700 MHz |
| | 3.8 dBi @ 1900 MHz |
| | 3.4 dBi @ 2100 MHz |
| | 3.2 dBi @ 2600 MHz |
| VSWR | < 3:1 |
| Pattern | Near omnidirectional in Azimuth |
| Polarization | Vertical |
| Power | 25 W |
| Size | 16.2" × 1.25" |
| Weight | 9 oz |
| Connector Type* | TNC Male |

*N-type male connector also available.

VSWR

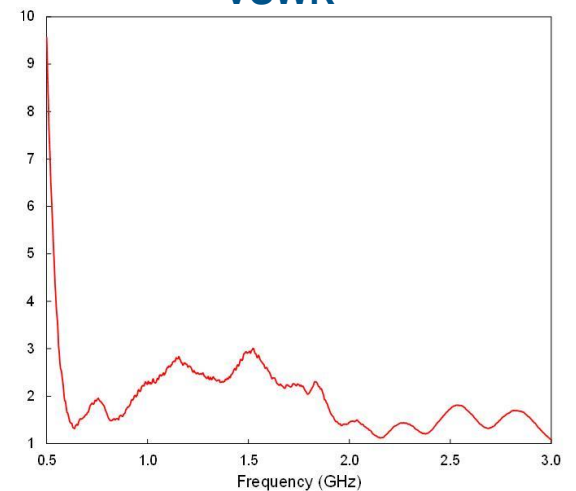

Radiation Patterns

