

900 MHz ISM Gooseneck Antenna



Features

- 900 – 930 MHz operation
- Flexible gooseneck for man-pack use
- Omni-directional in azimuth

How to Buy

Standard Configuration: **MP-900-930**

Configurations: **MP-900-930-x**

Model _____



Configuration _____

N= N-Type Male Connector

Characteristics

Model Number	MP-900-930
Frequency	900 – 930 MHz
Gain	2 dBi @ 915 MHz
Pattern	Dipole
Polarization	Vertical
VSWR	< 2.5:1
Size	12.3" × 0.5"
Weight	4 oz
Connector Type	TNC Male

Radiation Patterns

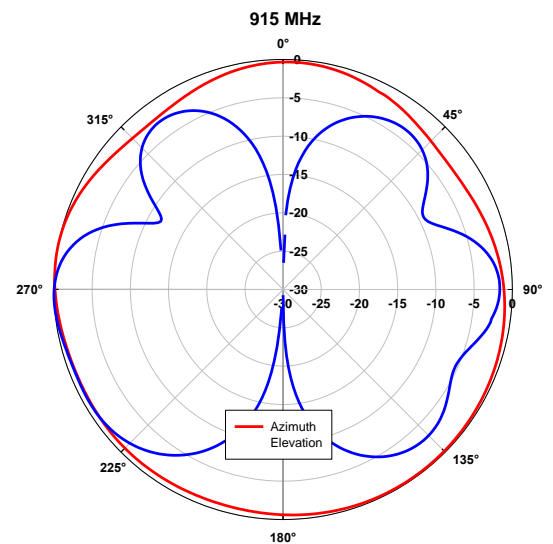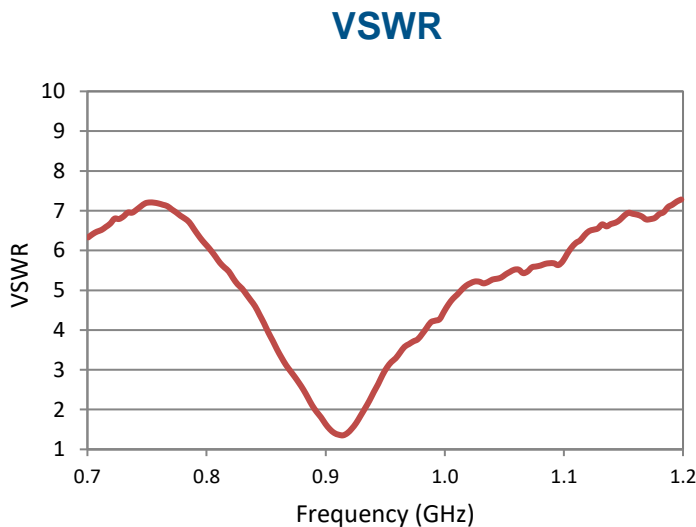

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • email info@pharad.com
www.pharad.com