


Compact VHF to L-band Gooseneck Antenna 225 – 1850 MHz

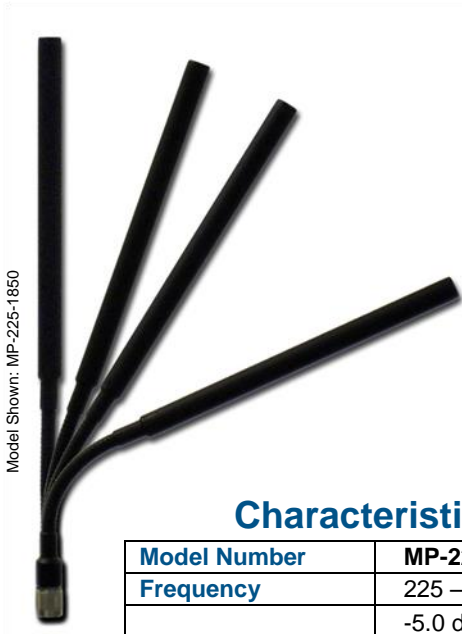

Features


- Optimized for dismounted radios:
 - 225-450 MHz,
 - 1250-1390 MHz
 - 1755-1850 MHz
- Flexible gooseneck for man-pack use
- Compact radiator for small form factor radios

Characteristics



Model Number	MP-225-1850
Frequency	225 – 1850 MHz
Gain	-5.0 dBi @ 240 MHz -2.4 dBi @ 400 MHz 1.2 dBi @ 1250 MHz 1.6 dBi @ 1390 MHz 2.0 dBi @ 1755 MHz 1.8 dBi @ 1850 MHz
Pattern	Near omni
Polarization	Vertical
VSWR	< 3.0:1 in relevant bands
Size	10.8" (L) × 0.5" (Ø)
Weight	2.4 oz
Connector Type*	TNC Male

* N-type male connector also available.

Radiation Patterns

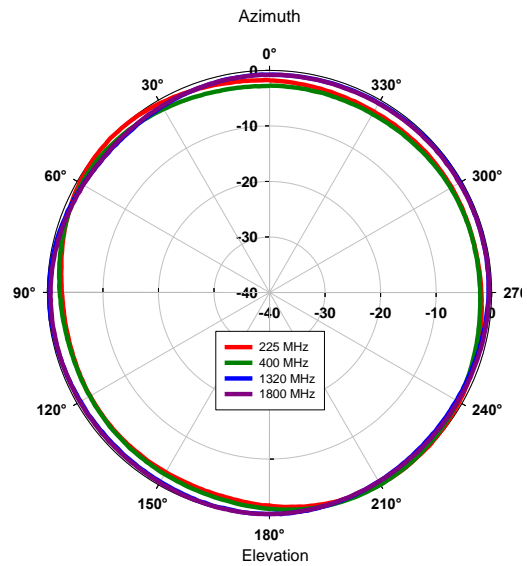

VSWR

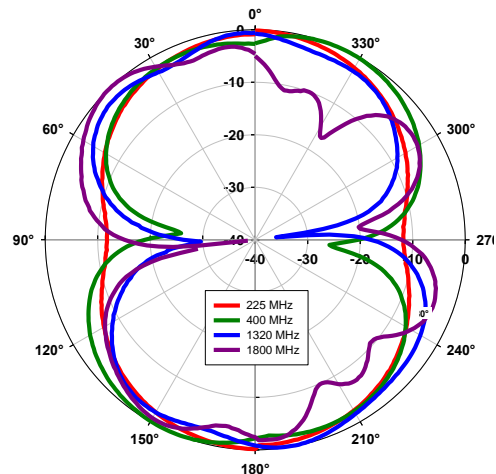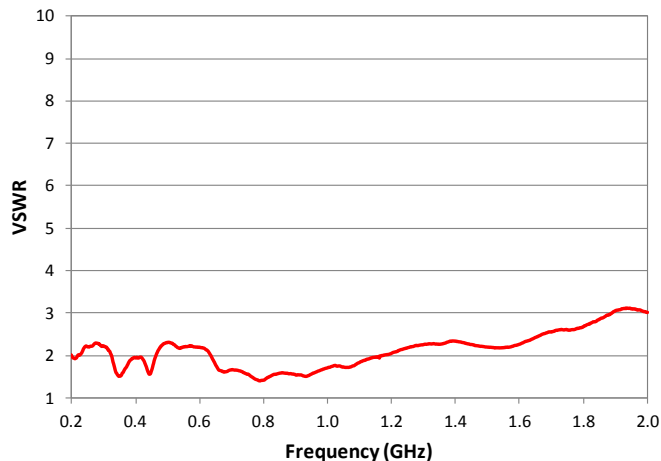

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • email info@pharad.com
www.pharad.com