


# S-band Gooseneck Antenna

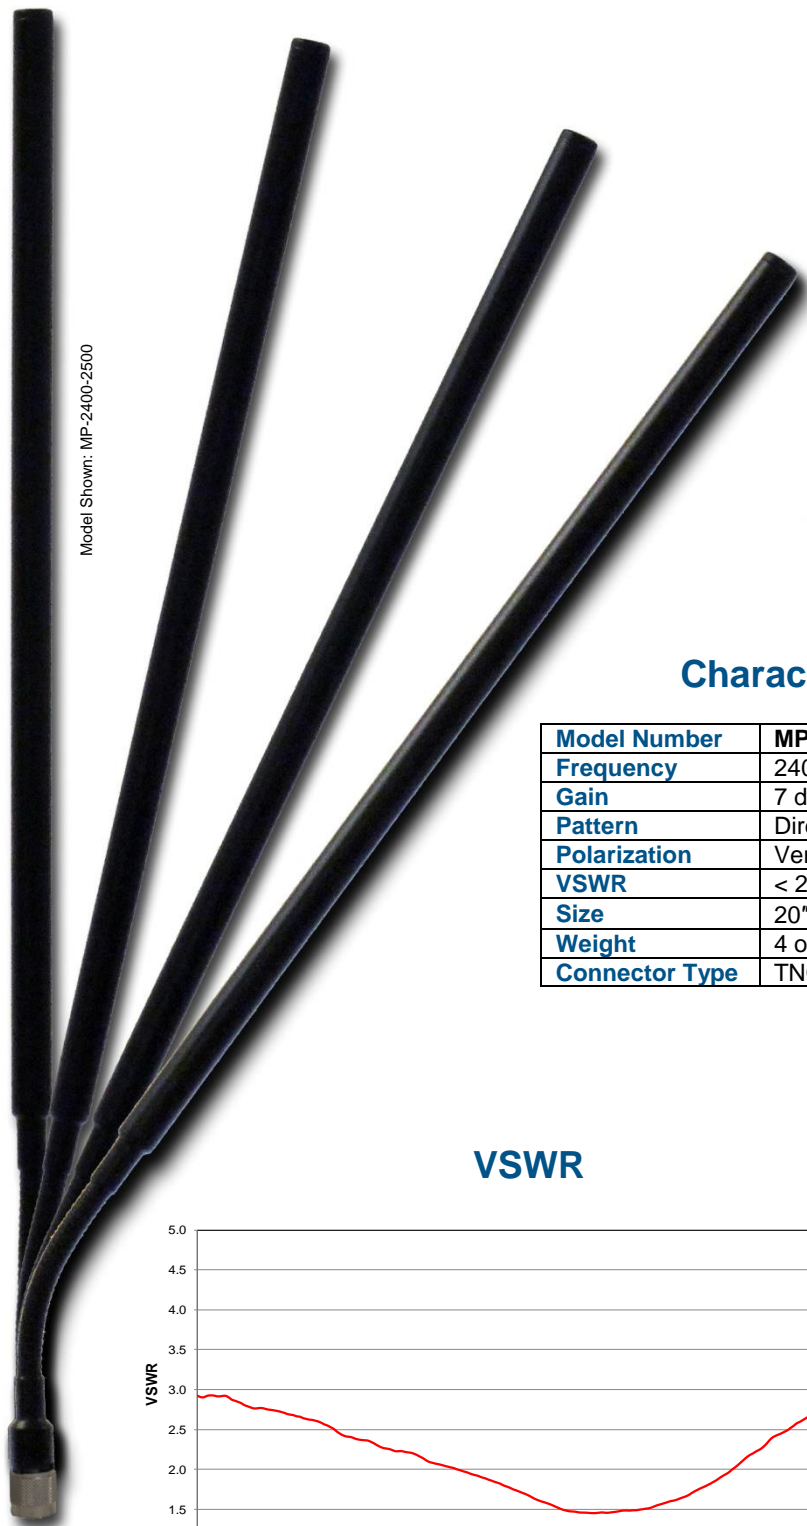

## Features

- 2400 to 2500 MHz operation
- Flexible gooseneck for man-pack use
- Omni-directional in azimuth

## How to Buy

Standard Configuration: **MP-2400-2500**

Configurations: **MP-2400-2500-x**

Model \_\_\_\_\_


Configuration \_\_\_\_\_

N= N-type Male Connector


## Characteristics

<b>Model Number</b>	<b>MP-2400-2500</b>
<b>Frequency</b>	2400 – 2500 MHz
<b>Gain</b>	7 dBi @ 2450 MHz
<b>Pattern</b>	Directional in Elevation
<b>Polarization</b>	Vertical
<b>VSWR</b>	< 2.5:1
<b>Size</b>	20" x 0.5"
<b>Weight</b>	4 oz
<b>Connector Type</b>	TNC Male

## Radiation Patterns

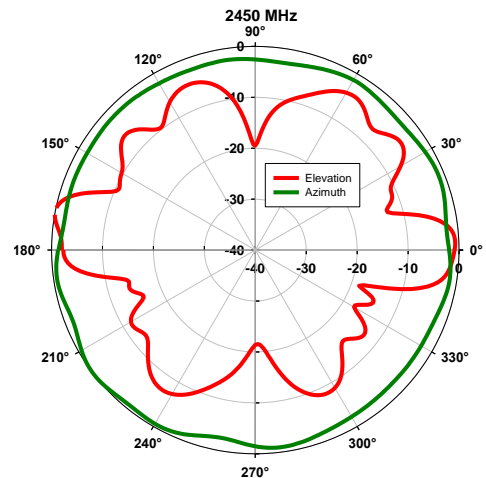

## VSWR

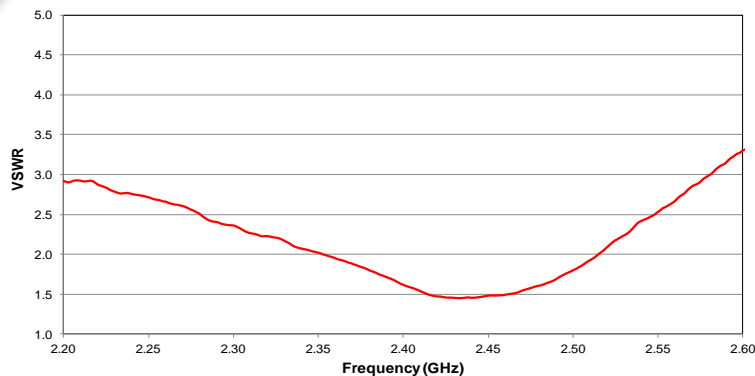

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • email info@pharad.com  
[www.pharad.com](http://www.pharad.com)