


L-, S-, & C-band Omnidirectional Antenna



Features

- Optimized for stationary radios:
 - 1000 – 1365 MHz,
 - 3150 – 3485 MHz
 - 5300 – 6000 MHz
- Compact radiator for small form factor radios
- Other connectors also available

VSWR

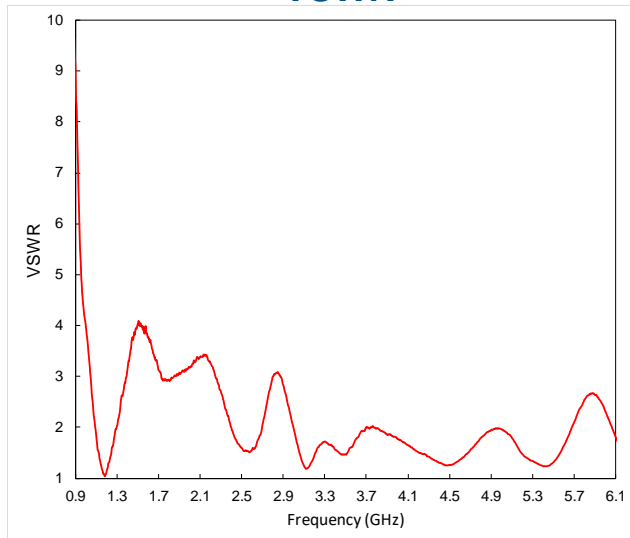


Characteristics

Model Number	FV-1000-6000
Frequency	1005 – 1365 / 3150 – 3485 / 5300 – 6000 MHz
Gain	3.1 dBi @ 1200 MHz 6.6 dBi @ 3300 MHz 6.0 dBi @ 5800 MHz
VSWR	< 3.0:1 in relevant bands
Pattern	Near Omnidirectional in Azimuth
Polarization	Vertical
Power	10 W
Size	8.5" × 1.2"
Weight	3.2 oz
Connector Type*	TNC Male

* N-type male connector also available.

Model Shown: FV-1000-6000

Radiation Patterns

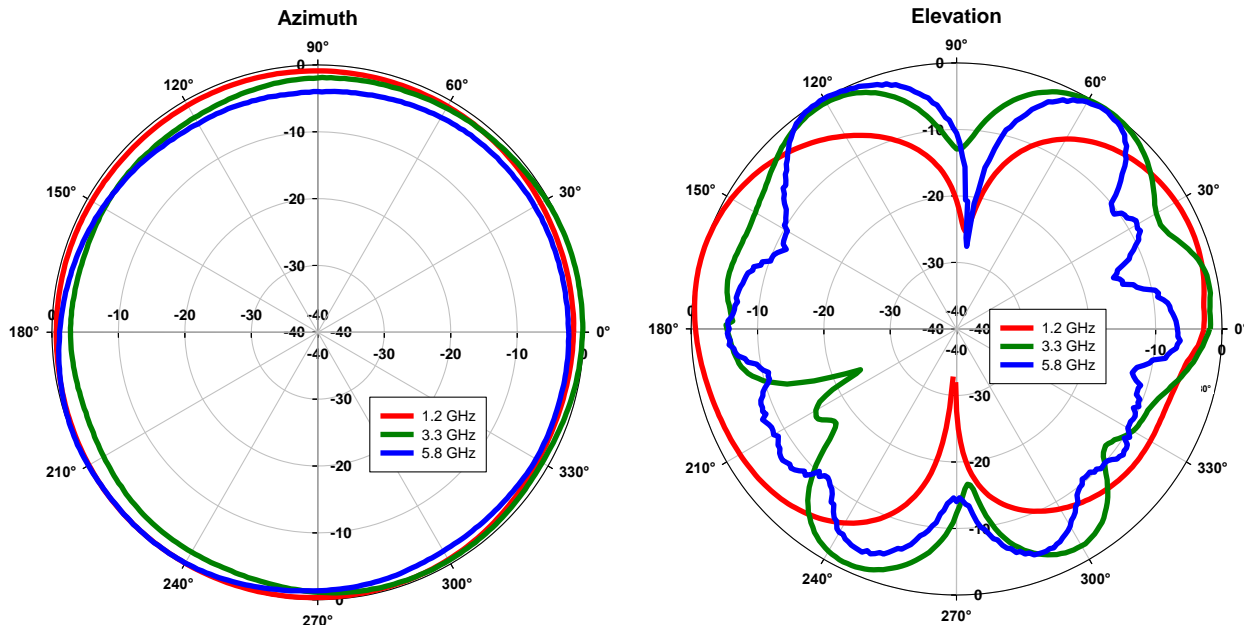

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • email info@octanewireless.com
www.octanewireless.com