

UHF to C-band Peel & Stick Appliqué



Model Shown: AA-225-6000

Features


- 225 – 6000 MHz operational bandwidth
- Low visibility
- Ideal for mounting on non-metallic, low-loss materials such as glass, fiberglass, polyethylene, polycarbonate, and other plastics
- Easily adheres to surface
- Quick installation (< 1 minute)
- Highly efficient antenna

Characteristics



Model Number	AA-225-6000
Frequency	225 – 6000 MHz
Gain	0.0 dBi @ 200 MHz 2.1 dBi @ 600 MHz 2.7 dBi @ 900 MHz 3.1 dBi @ 2000 MHz 4.1 dBi @ 3600 MHz 5.7 dBi @ 5800 MHz
Pattern	Near omni
Polarization	Vertical
VSWR	< 3:1
Nominal Impedance	50 Ohms
Size	13.4" x 10.2"
Cable Length	15.75"
Weight	1 oz
Connector Type*	SMA Male

*Alternate connectors available.


VSWR

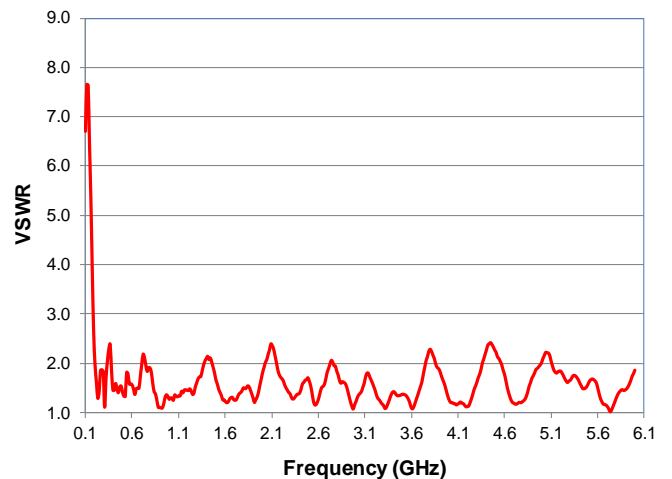

Radiation Patterns

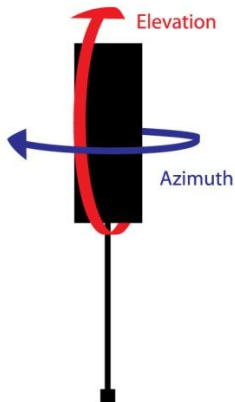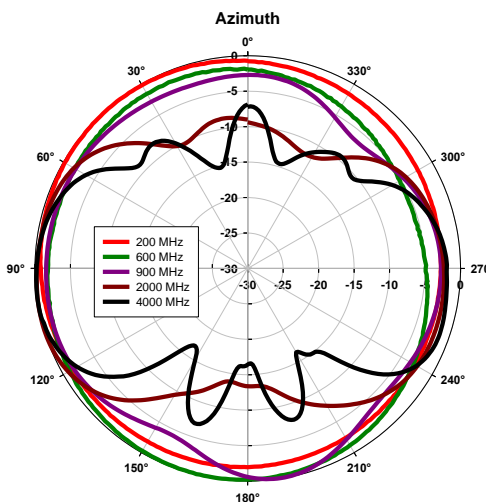

Radiation Patterns

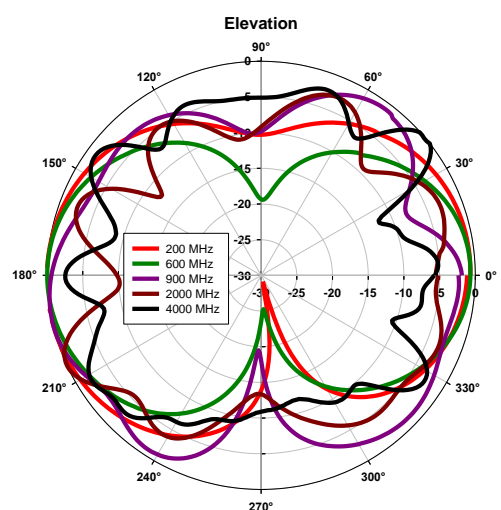

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.