

UHF to C-band Gooseneck Antenna: 400 – 6000 MHz

Features


- Optimized for dismounted radios:
 - 400 – 500 MHz
 - 1700 – 1850 MHz
 - 2200 – 2500 MHz
 - 4400 – 4950 MHz
 - 5250 – 5850 MHz
- Flexible gooseneck for man-pack use
- Smallest UHF to C-band antenna available
- TNC Male Connector

Characteristics

Model Number	MP-400-6000
Frequency	400 – 6000 MHz
Gain	-0.5 dBi @ 400 MHz 0.1 dBi @ 700 MHz 0.4 dBi @ 900 MHz 0.6 dBi @ 1300 MHz 0.5 dBi @ 1800 MHz 2.1 dBi @ 2400 MHz 1.5 dBi @ 4400 MHz 4.5 dBi @ 5800 MHz
Pattern	Dipole
Polarization	Vertical
VSWR	< 3.0:1 in relevant bands
Size (L x Ø)	19.5" x 1.25"
Weight	8.8 oz
Connector Type*	TNC Male

*MP-400-6000-N with N-Type Male also available

VSWR

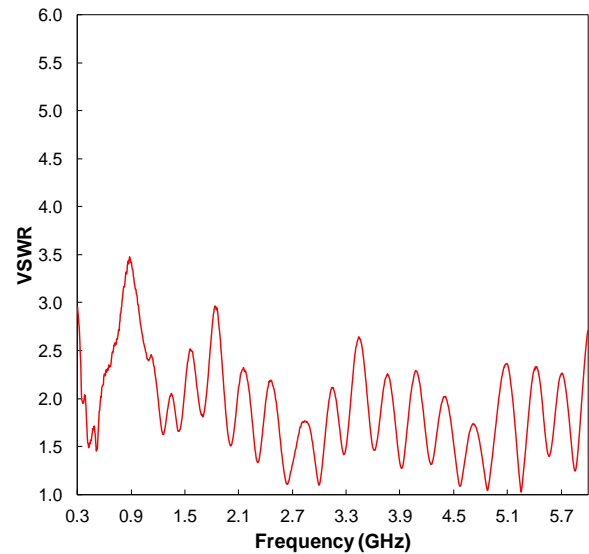

Radiation Patterns

