

Multi-band L-, S-, and C-band Magnetic Mount




Model Shown: VM-1600-5900-M


Features


- O Operation over 1600 5900 MHz
- Includes rare Earth magnetic mount to vehicles
- Ideal solution for vehicle applications requiring quick attachments

Characteristics

| Model Number | VM-1600-5900 |
|----------------|--|
| Frequency | 1600 – 5900 MHz |
| Gain | 4.5 dBi @ 1600 MHz 3.0 dBi @ 2400 MHz 2.5 dBi @ 4400 MHz 3.0 dBi @ 5800 MHz |
| VSWR | < 3:1 |
| Pattern | Near Omnidirectional in Azimuth |
| Polarization | Vertical |
| Power | 10 W |
| Size | 4.5" × 2.4" |
| Weight | 7 oz |
| Connector Type | TNC Female |



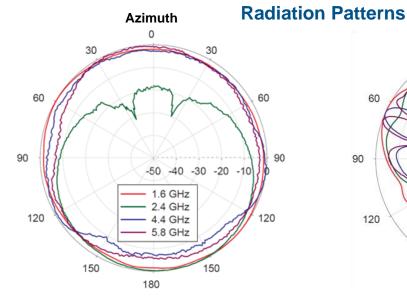



1340 Charwood Road, Suite L Hanover, MD 21076 • phone 410-590-3333 • info@octanewireless.com www.octanewireless.com

Document #: 900131 8/2019

ment #: 900131 Specifications subject to change without notice