

LTE Omnidirectional Antenna: 700 – 2600 MHz




Model Shown: VM-700-2600

Features

- Operation over worldwide LTE bands 700 – 2600 MHz
- Completely passive, no tuning or adjustment required
- Less than 7 inches tall
- Flange mount form factor

VSWR

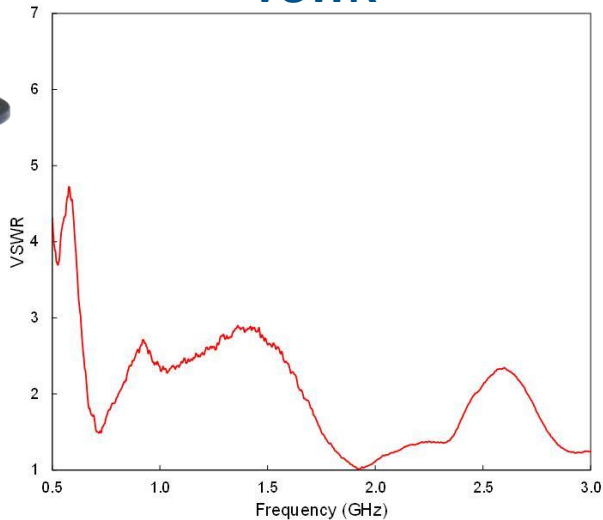

Characteristics

Model Number	VM-700-2600
Frequency	700 – 2600 MHz
Gain	1.8 dBi @ 700 MHz 2.2 dBi @ 900 MHz 3.4 dBi @ 1700 MHz 3.5 dBi @ 1900 MHz 3.2 dBi @ 2100 MHz 3.0 dBi @ 2600 MHz
VSWR	< 3:1
Pattern	Near Omnidirectional in Azimuth
Polarization	Vertical
Power	25 W
Mounting	Four 0.13" holes on a 1.61" circle
Size	7.7" × 1.3"
Weight	6.3 oz
Connector Type	N-type Female

Radiation Patterns

