

Peel & Stick Appliqué Antenna, 1300 – 6000 MHz



Model Shown: AA-1300-6000

Features


- 1300 – 6000 MHz operational bandwidth
- Low visibility
- Highly efficient antenna
- Ideal for mounting on non-metallic, low-loss materials such as glass, fiberglass, polyethylene, polycarbonate, and other plastics
- Easily adheres to surface
- Quick installation (< 1 minute)

Characteristics


Model Number	AA-1300-6000
Frequency	1300 – 6000 MHz
Gain	2.0 dBi @ 1300 MHz 2.3 dBi @ 1800 MHz 2.9 dBi @ 2400 MHz 3.4 dBi @ 3600 MHz 4.0 dBi @ 4400 MHz
Pattern	Near omni
Polarization	Vertical
VSWR	< 2.6:1
Nominal Impedance	50 Ohms
Size	3" x 1.2"
Cable Length	16"
Weight	2 oz
Connector Type*	SMA Male

*Alternate connectors available.



VSWR

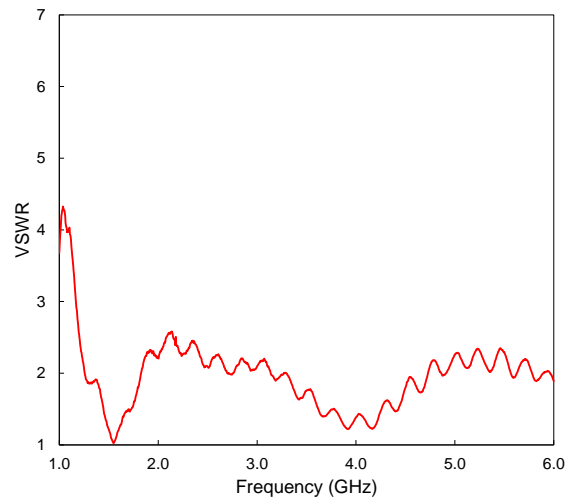

Radiation Patterns

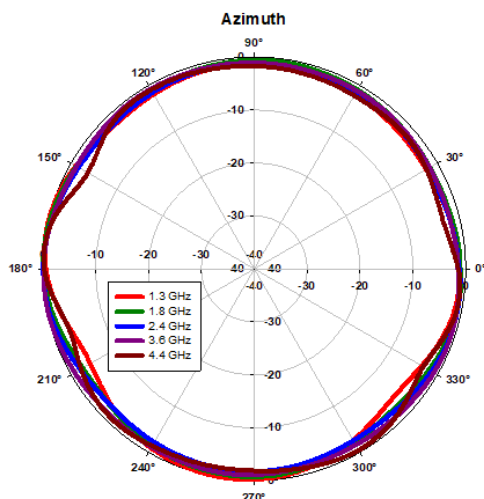

Radiation Patterns

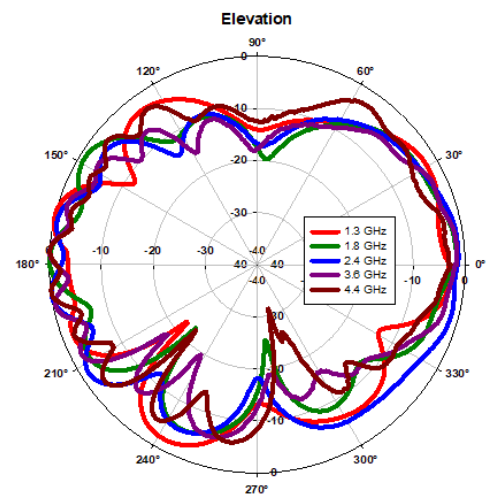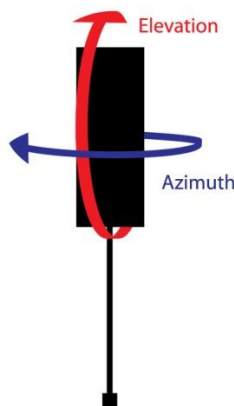

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.