

# Peel & Stick Appliqué Antenna, 420 – 480 MHz




Model Shown: AA-420-480

#### **Features**


- O 420 480 MHz operational bandwidth
- O Low visibility from outside vehicle
- Ideal for mounting on non-metallic, low-loss materials such as glass, fiberglass, polyethylene, polycarbonate, and other plastics
- O Easily adheres to surface
- Quick installation (< 1 minute)
- Electrically small antenna
- Other connector options available

# **Characteristics**


Model Number	AA-420-480
Frequency	420 – 480 MHz
Gain	> 2 dBi
Pattern	Near omni
Polarization	Linear
VSWR	2.5:1
Nominal Impedance	50 Ohms
Size	11.3" × 4.5"
Cable length	18"
Weight	0.3 oz
Connector Type	SMA



## **Radiation Patterns**



### **VSWR**

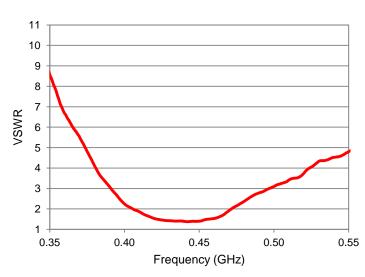

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.

1340 Charwood Road, Suite L. Hanover, MD 21076 phone 410-590-3333 email info@octanewireless.com www.octanewireless.com Document Number: 900166

5/2013