

Enhanced Gain LTE Gooseneck Antenna




Model Shown: MP-700-2600

Features

- Covers worldwide LTE bands
- 700 – 2600 MHz operation
- Flexible gooseneck for man-pack use
- Omni-directional in azimuth
- TNC or N-type male connector



VSWR

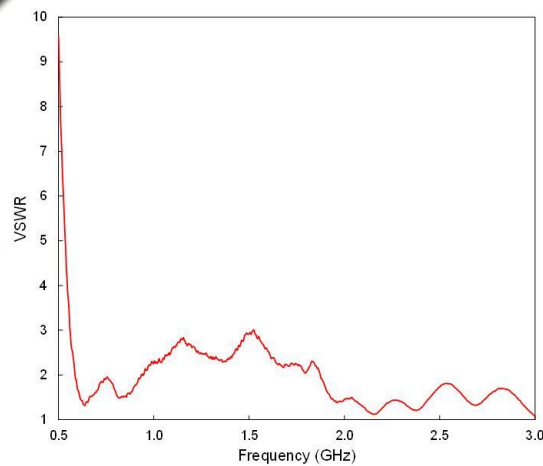

Characteristics

Model Number	MP-700-2600
Frequency	700 – 2600 MHz
Gain	2.0 dBi @ 700 MHz 2.4 dBi @ 900 MHz 3.6 dBi @ 1700 MHz 3.8 dBi @ 1900 MHz 3.4 dBi @ 2100 MHz 3.2 dBi @ 2600 MHz
Pattern	Dipole
Polarization	Vertical
VSWR	< 3:1
Size	16.2" × 1.25"
Weight	9 oz
Connector Type	TNC Male or N-Type

Radiation Patterns

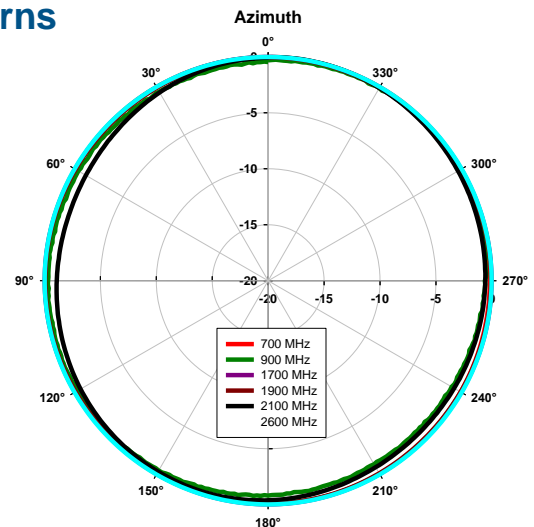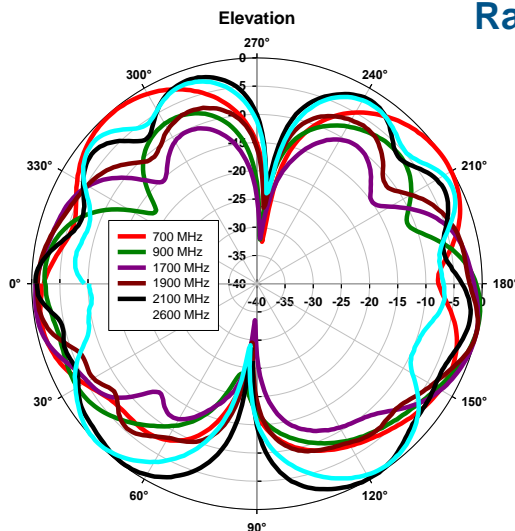

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • email info@pharad.com
www.pharad.com