


Dual Band, L- and C-band Gooseneck Antenna

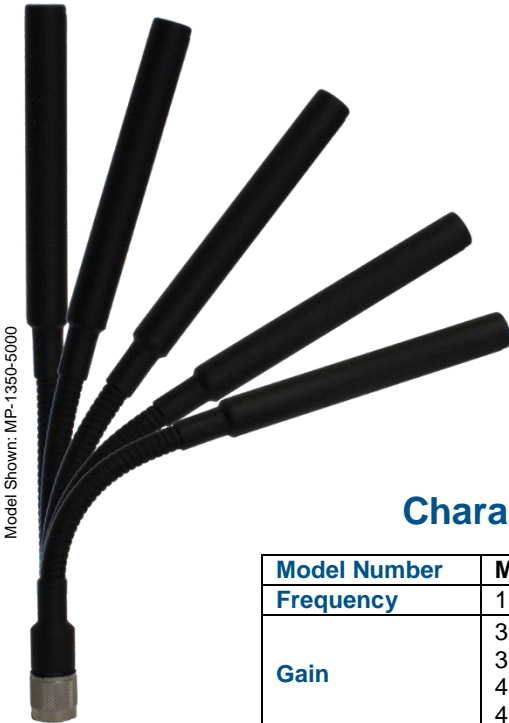

Features

- Suitable for Dual Band Applications
 - L-band (1350 – 1390 MHz)
 - Low C-band (4400 – 4700 MHz)
 - Federal C-band (4400 – 5000 MHz)
 - High C-band (4400 – 5000 MHz)
- Flexible gooseneck for man-pack use
- Omni-directional in azimuth

Characteristics

Model Number	MP-1350-5000
Frequency	1350-1390 / 4400 - 5000 MHz
Gain	3.5 dBi @ 1350 MHz 3.6 dBi @ 1390 MHz 4.3 dBi @ 4400 MHz 4.8 dBi @ 5000 MHz
Pattern	Dipole
Polarization	Vertical
VSWR	< 2.5:1 1350 – 1390 MHz < 2.5:1 4400 – 5000 MHz
Size	9.75" × 0.5"
Weight	4 oz
Connector Type	TNC Male

How to Buy

Standard Configuration: **MP-1350-5000**


Configurations: **MP-1350-5000-x**

Model _____



Configuration _____

N= N-type Male Connector

VSWR

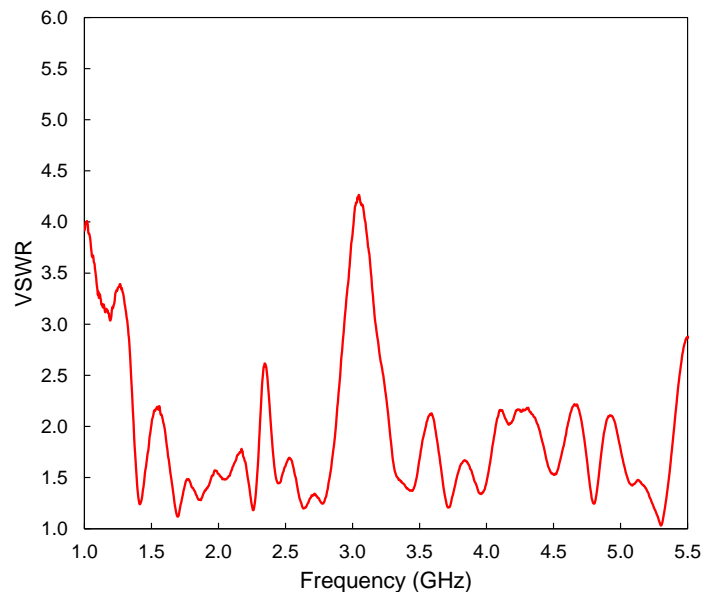

Radiation Patterns

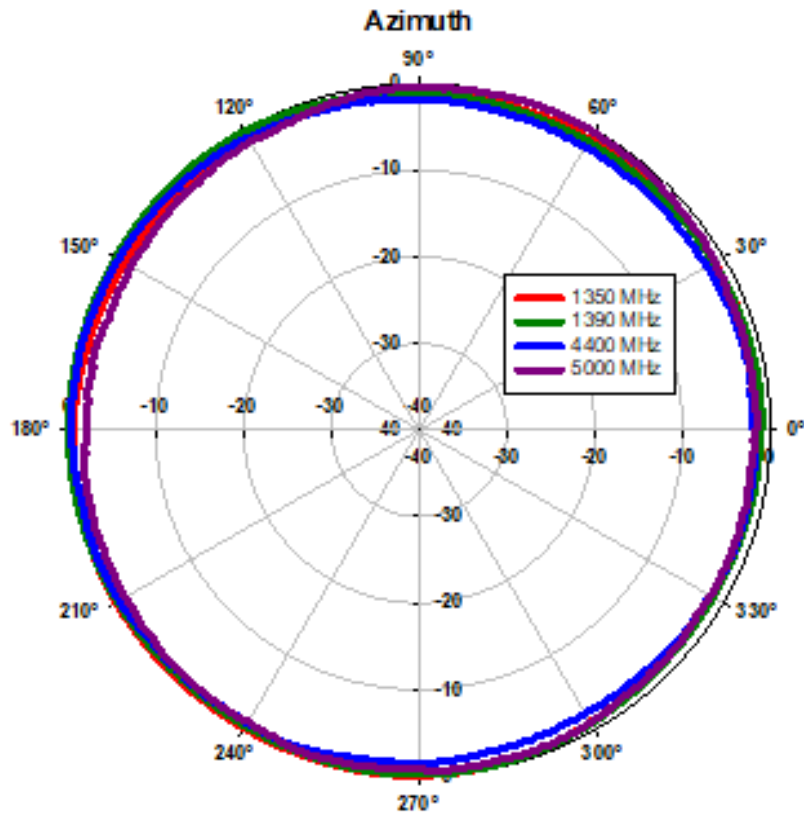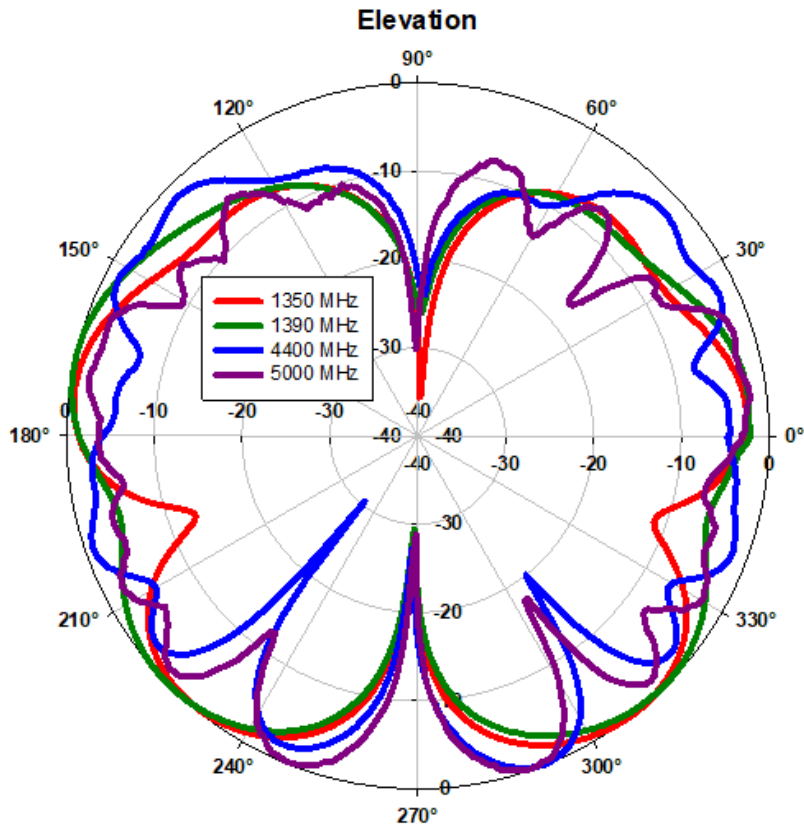

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • email info@pharad.com
www.pharad.com