

Multi-band L-, S-, and C-band Gooseneck Antenna



Model Shown: MP-1600-5900

Features

- 1600 – 5900 MHz operation
 - L-band
 - S-band
 - C-band
- Flexible gooseneck for man-pack use
- Omni-directional in azimuth

Characteristics

Model Number	MP-1600-5900
Frequency	1600 – 5900 MHz
Gain	4.3 dBi @ 1600 MHz 2.4 dBi @ 1800 MHz 2.1 dBi @ 2400 MHz 3.0 dBi @ 4400 MHz 5.2 dBi @ 5900 MHz
VSWR	< 2.5:1 for L-band < 2.0:1 for S- and C-band
Pattern	Dipole
Polarization	Vertical
Size	9" x 0.5"
Weight	3 oz
Connector Type	TNC Male


How to Buy

Standard Configuration: **MP-1600-5900**





Configurations: **MP-1600-5900-x**

Model _____
 Configuration _____
 N= N-type Male Connector

VSWR

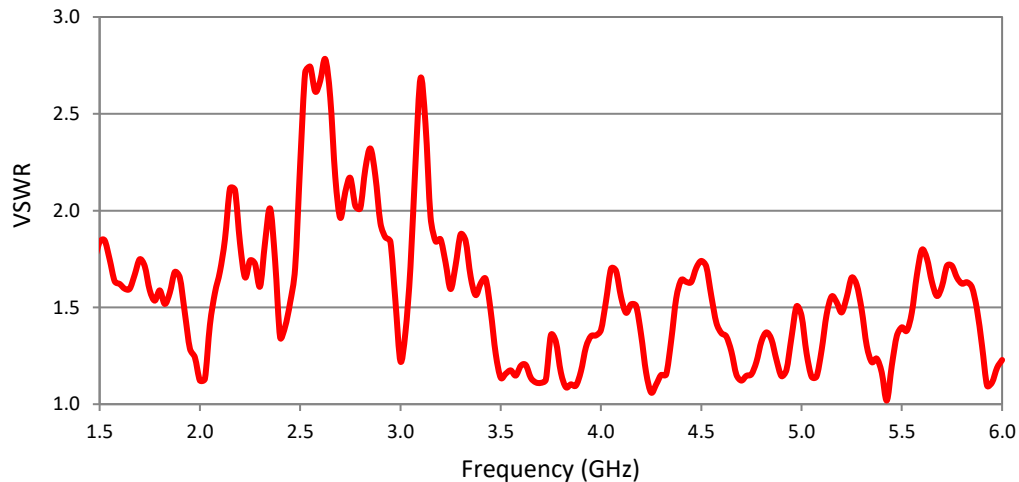

Radiation Patterns

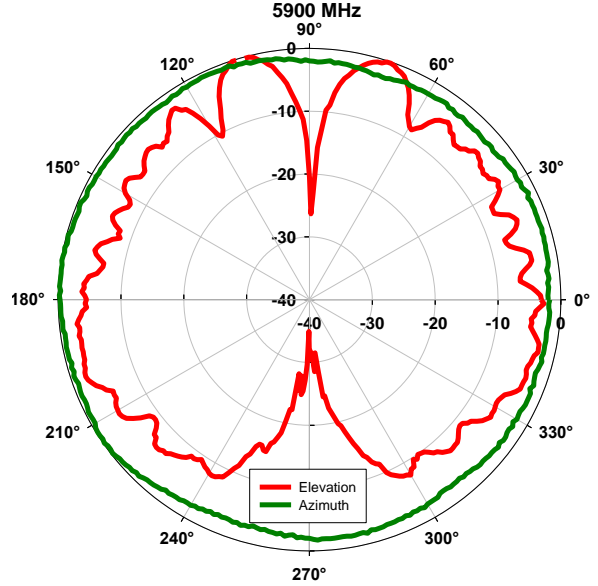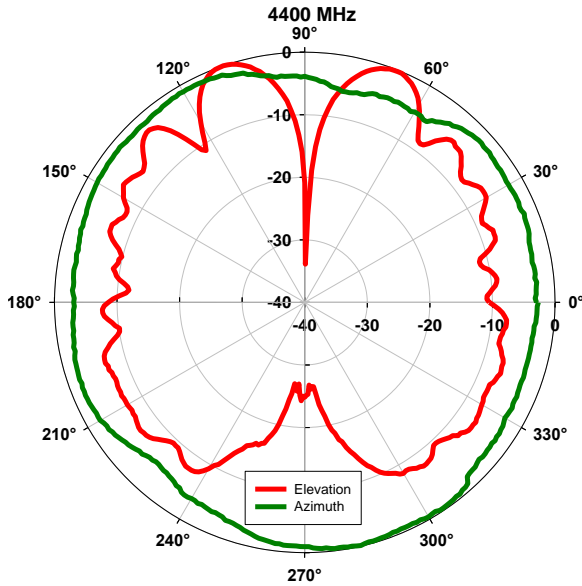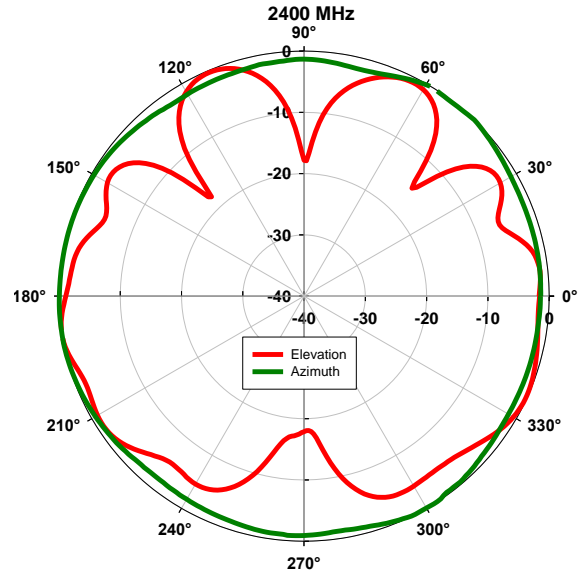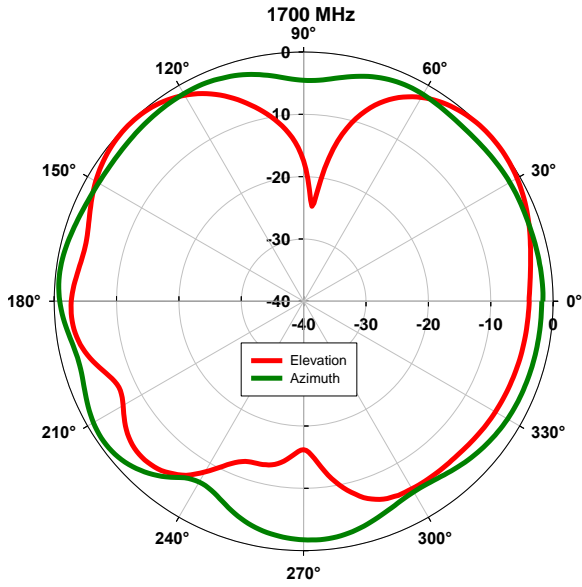

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.

1340 Charwood Road, Suite L • Hanover, MD 21076 • phone 410-590-3333 • info@pharad.com
www.pharad.com