


VHF/UHF Peel & Stick Appliqué

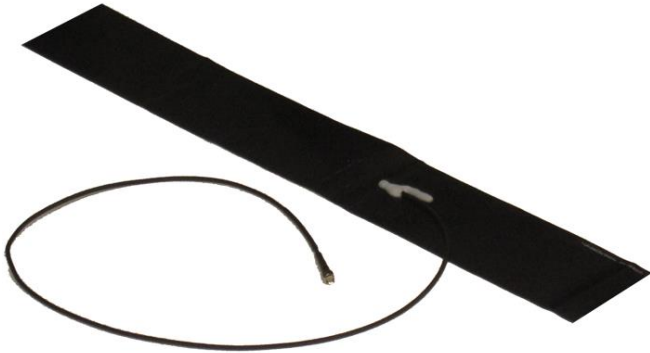

Features


- 225 – 512 MHz operational bandwidth
- Low visibility
- Ideal for mounting on non-metallic, low-loss materials such as glass, fiberglass, polyethylene, polycarbonate, and other plastics
- Easily adheres to surface
- Quick installation (< 5 minutes)
- Highly efficient antenna

Characteristics



Model Number	AA-225-512
Frequency	225 – 512 MHz
Gain	1.9 dBi @ 225 MHz 2.2 dBi @ 320 MHz 2.6 dBi @ 430 MHz 3.0 dBi @ 520 MHz
Pattern	Near omni
Polarization	Vertical
VSWR	< 3:1
Nominal Impedance	50 Ohms
Size	18.6" x 3.5"
Cable Length	119"
Weight	4 oz
Connector Type*	SMA Male

*Alternate connectors available.


VSWR

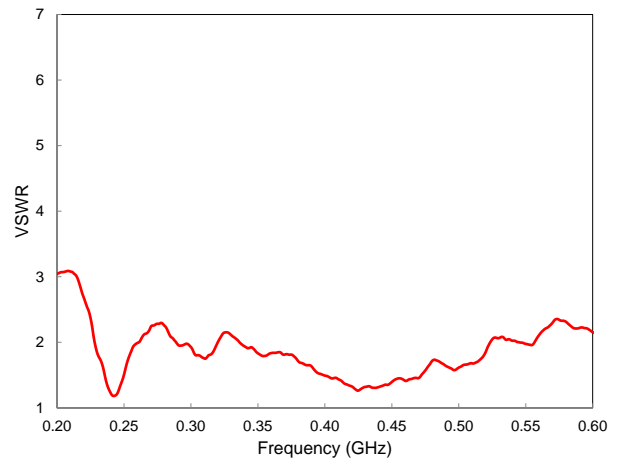

Radiation Patterns

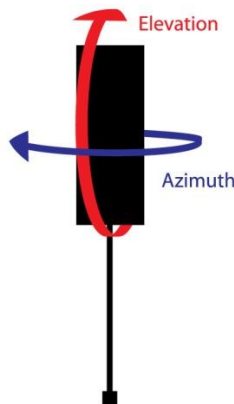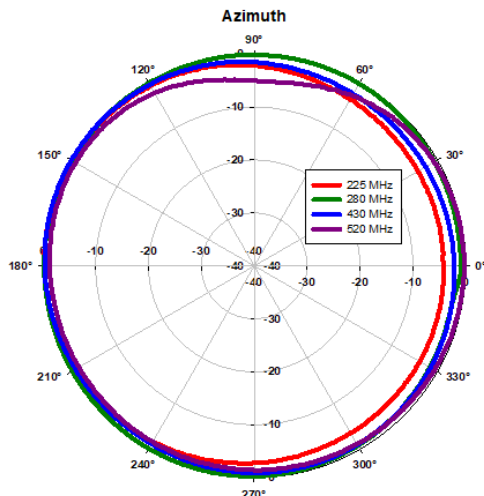

Radiation Patterns

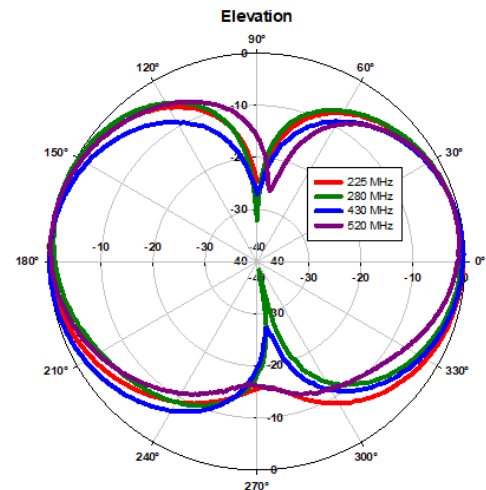

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.