

# Dual Band L- and S-band Gooseneck Antenna



Model Shown: MP-1350-2500

## Characteristics


<b>Model Number</b>	<b>MP-1350-2500</b>
<b>Frequency</b>	1350 – 1390 / 2200 – 2500 MHz
<b>Gain</b>	3.5 dBi @ 1350 MHz 3.6 dBi @ 1390 MHz 3.8 dBi @ 2200 MHz 3.9 dBi @ 2500 MHz
<b>VSWR</b>	< 2.5:1
<b>Pattern</b>	Near Omnidirectional in Azimuth
<b>Polarization</b>	Vertical
<b>Power</b>	10 W
<b>Size</b>	10.25" × 0.5"
<b>Weight</b>	2.6 oz
<b>Connector Type*</b>	TNC Male

\*N-type male and TNC RP connectors also available.

## Features

- Suitable for Dual Band Applications
  - L-band (1350 – 1390 MHz)
  - Federal S-band (2200 – 2500 MHz)
  - 2.4 GHz ISM (2400 – 2500 MHz)
- Flexible arm to reposition antenna
- Other connectors available

## VSWR

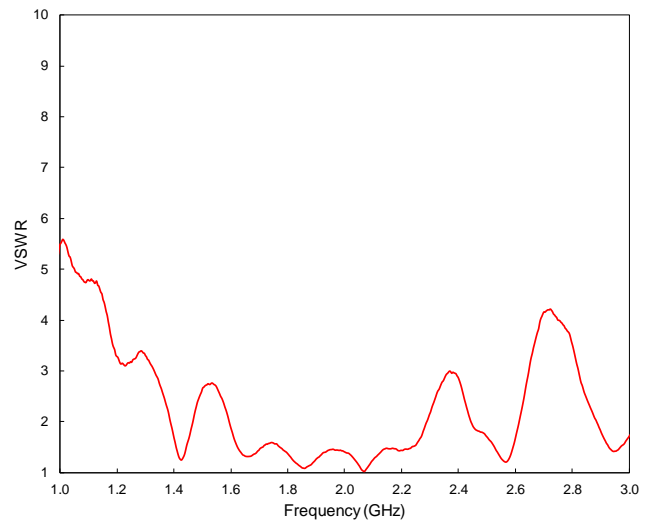

## Radiation Patterns

