

## **Dual Band S- and C-band Gooseneck Antenna**




## **Characteristics**


Model Number	MP-2200-5000
Frequency	2200 – 2500 / 4400 – 5000 MHz
Gain	3.0 dBi @ 2200 MHz
	3.1 dBi @ 2500 MHz
	3.5 dBi @ 4400 MHz
	3.7 dBi @ 5000 MHz
VSWR	< 2.5:1
Pattern	Near Omnidirectional in Azimuth
Polarization	Vertical
Power	10 W
Size	10.25" × 0.5"
Weight	2.6 oz
Connector Type*	TNC Male


<sup>\*</sup>N-type male and TNC RP connectors also available.

## **Features**

- O Suitable for Dual Band Applications
  - o Federal S-band (2200 2500 MHz)
  - o 2.4 GHz ISM (2400 2500 MHz)
  - Low C-band (4400 4700 MHz)
  - o Federal C-band (4400 5000 MHz)
  - High C-band (4400 5000 MHz)
- O Flexible arm to reposition antenna
- O Other connectors available



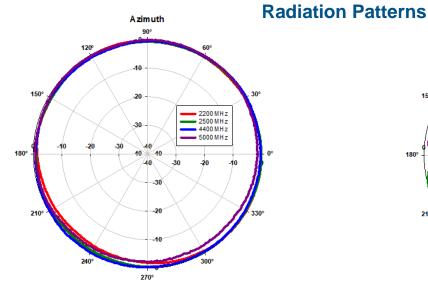



1340 Charwood Road, Suite L · Hanover, MD 21076 · phone 410-590-3333 · email info@octanewireless.com www.octanewireless.com